

WW07L

• Drain and Grease Trap - Liquid

Product Description

WW07L is specially formulated and packaged for direct addition to drains and grease traps in restaurants and commercial buildings.

To assure optimal performance of these organisms under the toughest conditions, they are produced and blended with high potency nutrients, stimulants and surfactants.


WW07L contains microorganisms that are capable of degrading a wide range of oils and greases under aerobic, facultative and anaerobic conditions, combined with natural biological enhancers, micronutrients and macronutrients.

Reduce Grease and Solids Build-Up in Drains and Traps

When applied on a regular basis, WW07L reduces the accumulation of grease in sumps, drains and traps. By degrading the grease, other solids are free to flow through the system.

Benefits of WW07L

- Keeps floats clean
- Reduce grease build-up headaches
- Prevent emergency blockages
- Save on line jetting
- Lower grease disposal costs
- Reduce odours and Improve Performance in Septic Tank Systems

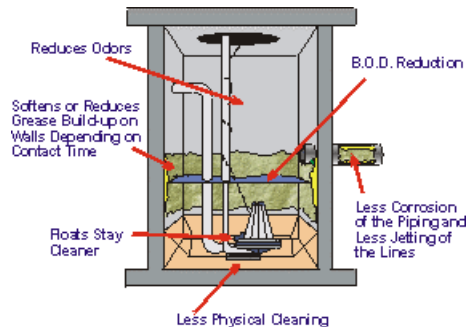

Packaging

Packaged to suit customer needs and for ease in use. 25 litre, 210 litre and 1000 litre IBC quantities available.

Specifications

Form:	Free-flowing liquid
Colour:	Pale Green
Fragrance:	Lemon
Nutrient Content:	Surfactants, Micronutrients & Biological Enhancers
Plate Count:	100 billion per litre

Safe to Use

All bacteria are: Naturally Occurring, Non-Pathogenic and Non-Opportunistic (Will not cause disease in a compromised host).



Tel: 01246 267931 Fax: 01246 267932

Further Information:

Application

Apply neat solution directly into drains. This is best done on a regular basis e.g. in the evening after a day's operation. Timed pumps are best – These can be set to dose the precise amount when required. Or dilute WW07L to 20 parts water and use resultant solution at the following rates.

Porta-Toilets

Add 5 litres directly and cover the solids with water to aid digestion. Every time the toilet is pumped, start treatment over again with 5 litres of product.

Recreational Vehicles, Caravans, Boats

Add 15ml per litre of water in the holding tank. Thereafter, use 10ml per litre as needed. For use at a dump station, add 1 litre per 50 litres of tank capacity. Then use 1/2 litre per week for maintenance.

Septic Tanks

Add 1 litre per cubic metre capacity for the initial treatment. Thereafter, use 1.5 litres per week. This may be poured directly into a toilet and flushed. If septic tank has become clogged and odorous, add 5 litres of product directly to the tank through the manhole.

Grease Traps

For less than 20 cubic feet capacity, add 150ml of product daily by pouring in a sink or pipeline closest to the trap. This should be done at night or when the traps are used the least. After adding, flush down with a cup of lukewarm water. For grease traps larger than 20 cubic feet, add 250 - 300ml daily using the same procedure.

Drain Lines and Down Pipes

Use product a minimum of 2 times weekly to a maximum of 7 times depending on the usage of the building. Add product in amounts listed below by pouring directly into the drain pipe starting on the lowest floor and working up at a rate of one floor each day. Do not treat same floor twice. When the top floor is reached, continue from the top floor only.

Pipe Size	Dosage	Frequency
2"	120ml	2 times / week
4"	240ml	2 times / week
6"	360ml	2 times / week
8"	480ml	2 times / week



Tel: 01246 267931

Fax: 01246 267932

The information presented in this Data Sheet is believed to be reliable. This information is provided as representative only and there are no warranties, expressed or implied, regarding its performance. Since neither distributor nor manufacturer has any control over handling, storage, use and application conditions, neither distributor nor manufacturer shall be responsible for loss, damage or expense arising out of or in any way connected with the handling, storage, or use of the product described.